

FAXCONT FC-16H

6" Half-Sphere Dome



Overview

- 6" Aluminum Dome Enclosure, suitable for Indoor Installation.
- Double-decked design strengthens the heat insulation.
- Built-in Fan & Heater to make sure the mechanism work in a precise temperature. (Optional)
- Equipped with a stainless steel retaining cable.
- FEVE Coating: Endure harsh environment, prevents acid and base moisture, five years warranty. (Optional)
- Transparent or Smoked Cover. (Selectable)
- Panel mounting hole: 225 mm


Related Products



6" Vandal Proof Cover



FC-1230



12V



24V



C600



L603





L704



L705

Dimensions

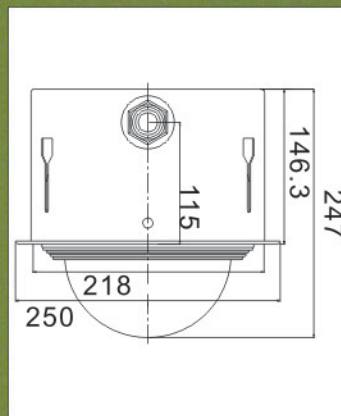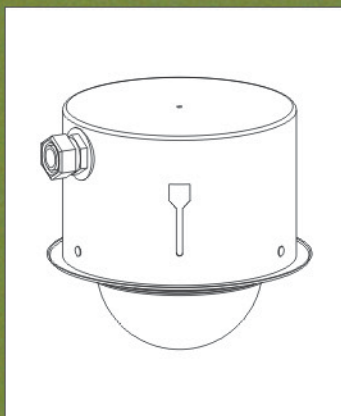

Adaptors

FC-16H 6" Half-Sphere Dome For IP Camera Models	
	Camera Models
AXIS	212
JVC	VN-C215V/C215VP、VN-V225VP、VN-X235VP
CANON	VB-C300/C300B、SNC-P5、SNC-DF40N
PANASONIC	HCM-581、HCM-584、WV-NS202A、WV-NW502S、WV-NW484S、WV-NF302、WV-NF284、WV-CW500S/504S、WV-CW480/484、WV-CW240/244
SAMSUNG	SID-450P、SID-460P、SID-500P、SID-560P/562P、SVD-4300P、SVD-4600P、SPD-1000P
ELMO	PTC-1000 Series、PTC-201C IP Series、PTC-400C Series
VIVOTEK	PT3112、PT3122、PZ6112、PZ6122、PT7135、PZ7111、PZ7112、PZ7121、PZ7151、PT3117、PT3127、PZ6114、PZ6124、PT7137、PZ7132、PZ7152
D-LINK	DCS-5300、DCS-5300G、DCS-5610、DCS-5610G、DCS-6620、DCS-6620G、DCS-5220G、DCS-5300G
ACTI	ACM-8201、ACM-8211、ACM-8511
PLUSTEK	P100、P1000A、P1100AF
SANYO	VCC-VH400

Technical Data

ENVIRONMENT	
Fan	: 40°C ON, 30°C OFF
Heater	: 5°C ON, 15°C OFF
In 12V DC, Consumption 12W Max.	
COMPLIANCE TO	
CE According to EMC DIRECTIVE 89/336/EEC (EN 61000-6-3 / EN 50130-4)	
FCC According to FCC Part 15 Class B (DoC)	
RoHS According to CS / 2006 / 70002 (SGS)	
ACCESSORIES	
P1230 UK Power Supply in 12V DC for UK	
P1230 USA Power Supply in 12V DC for USA	
P1230 EU Power Supply in 12V DC for EU	
P1230 JP Power Supply in 12V DC for JAPAN	
Fan Assisted Heater in 3A DC	