

SONY®

Color Block Cameras

FCB-EX Series



FCB-EX980S/FCB-EX980SP
FCB-EX980/FCB-EX980P
FCB-EX480C/FCB-EX480CP
FCB-EX48C/FCB-EX48CP

MAIN FEATURES

FCB-EX Series

Sony's new FCB-EX series of color block cameras represent an evolution in security dome, police vehicle and traffic monitoring applications. These high-sensitivity FCB-EX color block cameras are equipped with an integrated lens and incorporate such new and unique surveillance features such as: **Enhanced Spherical Privacy Zone Masking Function** for use with a pan/tilt system and Sony's **SMART Lens Control Technology**. In addition, these FCB-EX cameras also incorporate high-performance Digital Signal Processing (DSP) that provides for enhanced picture quality and operability compared to conventional block cameras.

The FCB-EX980S/980SP and FCB-EX980/EX980P color block cameras are equipped with an incredibly high 26x zoom lens with a wide/telephoto horizontal field of view, ideally suited for use in security domes and traffic monitoring applications. The FCB-EX980S/EX980SP cameras combine a 1/4 type Super HAD™ CCD with Sony's new powerful 26x zoom "SMART" lens with a high telephoto zoom capability and image stabilizer function, allowing users to zoom in on small or distant objects with exceptional clarity and stability. The FCB-EX980/EX980P cameras combine a high-sensitivity 1/4 type EXview HAD™ CCD and Sony's new powerful 26x zoom "SMART" lens with a wide horizontal field of view.

The FCB-EX480C/EX480CP and FCB-EX48C/EX48CP color block cameras are equipped with an 18x zoom lens and incorporate a high-sensitivity 1/4 type EXview HAD® CCD allowing images to be captured a minimum illumination of 0.7 lux.

In addition, all of these FCB-EX cameras are equipped with a variety of convenient functions such as E-Flip, Alarm, Picture Freeze and Auto ICR¹ which have been inherited from earlier FCB-EX Series cameras. Moreover, all of these FCB-EX cameras use lead-free solder and halogen-free printed circuit boards, making these cameras environmentally friendly.

Combining superb picture quality and a variety of unique and convenient features, these new FCB-EX cameras are the perfect match, both indoor or outdoor, for demanding security and monitoring applications.

- 26x Optical Zoom Capability - FCB-EX980S/EX980SP and FCB-EX980/EX980P
- 18x Optical Zoom Capability - FCB-EX480C/EX480CP and FCB-EX48C/EX48CP
- Enhanced Spherical Privacy Zone Masking Function (max. 24 masking blocks)
- SMART Lens Control (Sony Modular Automatic Lens Reset Technology)
- Electronic-Flip (E-Flip) Function
- Alarm Function
- Auto ICR (IR Cut- filter Removal) Mode²
- Picture Freeze Function
- Image Stabilizer³
- High-Performance Digital Signal Processing (DSP)
- High-Speed Serial Interface (max. 38.4 Kb/s) with TTL Signal-Level Control (VISCA™ protocol)
- Equipped with Key Switch Connector (CN601) for Camera Control with External Equipment
- Various Customizable Settings
- Internal/External Sync
- Low Power Consumption (1.6 W with motors inactive)
- EEPROM Backup System without Battery
- 16-Bytes of Free Memory is Available for Recording Data such as Product Serial Numbers and Camera/System ID Numbers
- Lead-free Solder and Halogen-free Printed-circuit-boards

¹ FCB-EX980S/EX980SP, FCB-EX980/EX980P, FCB-EX480C/EX480CP only

² FCB-EX980S/EX980SP, FCB-EX980/EX980P FCB-EX480C/EX480CP only

³ FCB-EX980S/EX980SP only

FEATURE DESCRIPTIONS

26x Zoom Capability with Wide/Telephoto Horizontal Field of View

(FCB-EX980S/EX980SP, FCB-EX980/EX980P)

These cameras incorporate a 26x optical zoom lens, allowing for a zoom capability of up to 312x when used in combination with its 12x digital zoom. Users can zoom in on small or distant objects with exceptional clarity.

The FCB-EX980S/EX980SP cameras feature a 42° wide field of view that provides the HIGHEST telephoto zoom capability (1.6°) available in the Sony FCB family. The zoom range is “tele-shifted” toward the telephoto end. The FCB-EX980/EX980P cameras feature a WIDE field of view of 54° and a 2.2° telephoto capability.

Enhanced Spherical Privacy Zone Masking

See Fig. 1

A newly developed Enhanced Spherical Privacy Zone Masking feature allows unwanted or prohibited areas within an image to be masked precisely and appropriately. This technology allows masking areas to be interlocked with Pan/Tilt/Zoom movements regardless of the camera angle. What is unique about this feature as compared to conventional masking is that the masked areas remain covered even when the camera is circling. In addition, when zoom is engaged, the size of all masked areas adjusts in proportion to the zoom position. This feature is essential for dome cameras used in wide-area monitoring applications.

Users can easily set masking areas on the screen by simply positioning each area to be masked in the center of viewer, indicated by two intersecting lines, and executing the masking function. A maximum of 24 masking areas can be preset to any of 160 horizontal and 120 vertical masking blocks, and up to eight block positions with two colors can be selected together.

Electronic-Flip (E-Flip) *See Fig. 2*

The FCB-EX cameras have an E-Flip function that electrically flips an image upside down so that it is displayed on the monitor accurately. In a dome application for example, if a tracked object moves beneath the camera dome, the image can be inverted to maintain the correct orientation.

Masking Controls

Maximum number of preset masking blocks	24 blocks
Maximum number of masking blocks to be displayed	8 blocks
Resolution of masking blocks	160 (H) x 120 (V)
Interlock with zoom	Yes
Interlock with pan/tilt ^{*1}	Yes
Maximum colors to be preset	28 ^{*2}
Maximum colors to be displayed	2 ^{*2}
Translucent masking	Yes
Gray scale	Yes ^{*3}
Individual masking On/Off	Yes
Title/day/time superimposition	Yes
Non-Interlock	Yes

^{*1} When used in a security dome

^{*2} Including translucent color

^{*3} 6 gradations selectable

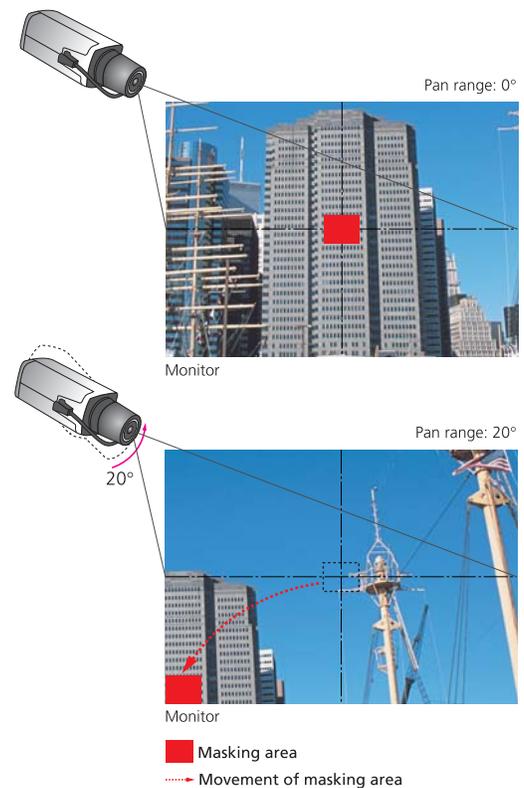


Fig. 1 Spherical Privacy Zone Masking

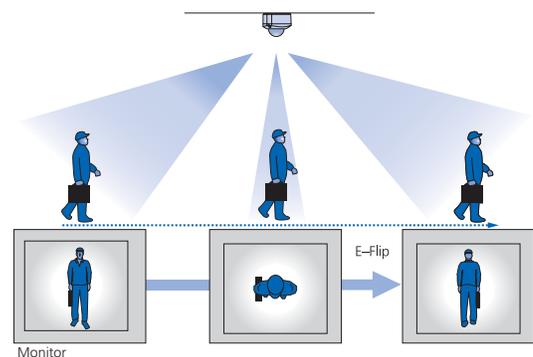


Fig. 2 E-Flip Function

SMART Lens Control (Sony Modular Automatic Lens Reset Technology)


These FCB cameras incorporate a SMART Lens Control technology that monitors lens focus position during zooming and automatically compensates for mechanical misalignment which may occur over long periods of continuous usage. With the introduction of SMART lens control, periodic lens initialization is no longer recommended in continuous 24 hour operation.

Alarm Function

The FCB-EX Series provides an Alarm function that detects changes in AF, AE, or both AF and AE levels of an image and outputs an alarm signal as required to external equipment via its control interface using VISCA protocol. This feature is ideal for automatically performing functions such as sounding an audible alarm or triggering an electric door strike to lock or unlock a door when focus or luminance levels change.

These cameras are also equipped with a Spot AE function that allows them to detect changes in AE levels of designated areas of the images, and output an alarm signal. Users can designate multiple detecting areas from any of 16 vertical and 16 horizontal blocks.

In addition, these cameras feature a DAY/NIGHT mode that can output an alarm signal via the VISCA protocol in response to a change in the designated brightness/darkness level.

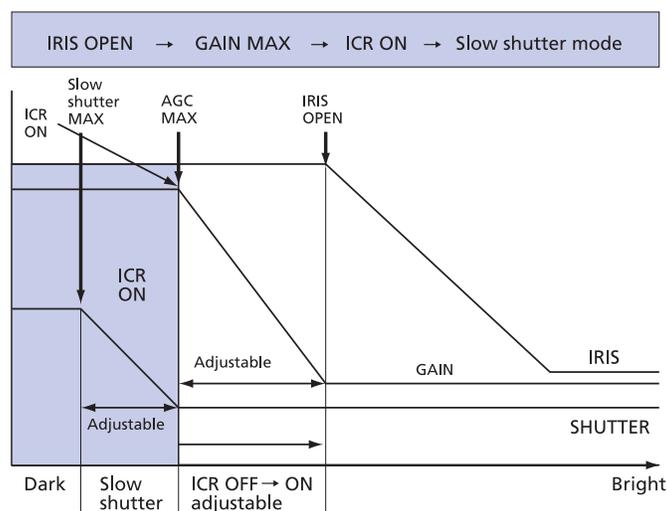

When auto slow shutter is on

Auto IR Cut Filter Removal (ICR)

(FCB-EX980S/EX980SP, FCB-EX980/EX980P, FCB-EX480C/EX480CP only)

For optimized sensitivity in both day and night-time shooting applications, these cameras incorporate an Auto ICR function. With a set level of darkness, the IR Cut filter is automatically disabled (ICR ON) and the infrared sensitivity is increased. With a set level of brightness, the filter is automatically enabled (ICR OFF). The ICR automatically engages depending on the ambient light, allowing the cameras to be effective in a variety of lighting conditions.

Picture Freeze

The FCB-EX Series is equipped with a Picture Freeze function that allows for the output of a still image while the camera is panning, tilting, zooming, focusing, initializing the lens, or performing preset operations. For example, the camera will output a still image before it begins to pan, tilt, or zoom, and once the operation is completed, the camera continues to display images; unnecessary images are not displayed.

EXview HAD™ CCD

(FCB-EX980/EX980P, FCB-EX480C/EX480CP, FCB-EX48C/EX48CP only)

Equipped with Sony EXview HAD CCD technology, these particular FCB cameras provide excellent sensitivity and low smear levels.

Image Stabilizer

(FCB-EX980S/EX980SP only)

The image stabilizer function minimizes the appearance of shaky images caused by low-frequency vibration and maintains a normal horizontal resolution. This function is useful for outdoor surveillance and traffic monitoring applications.

Environmentally-friendly Lead-free Design


FCB-EX Series cameras use lead-free solder and halogen-free printed-circuit boards, making these cameras environmentally friendly.

FCB-EX SERIES LINE-UP



FCB-EX980S/EX980SP FCB-EX980/EX980P

- 1/4-type Super HAD CCD (FCB-EX980S/EX980SP)
- 1/4-type EXview HAD CCD (FCB-EX980/EX980P)
- 312x Zoom Ratio (26x optical, 12x digital)
- Enhanced Spherical Privacy Zone Masking Function
- Image Stabilizer Function (FCB-EX980S/EX980SP)
- Minimum illumination of 1.0 lx (typical) (FCB-EX980/EX980P)
- E-Flip Function
- Alarm Function
- Spot AE
- Auto ICR (IR Cut-filter Removal) Mode
- Picture Freeze Function
- Key Switch Connector (CN601) for Camera Control with External Equipment
- Electronic Shutter/Slow Shutter
- High-Speed Serial Interface (maximum 38.4 Kb/s) with TTL Signal-Level Control (VISCA protocol)
- Internal/External Sync

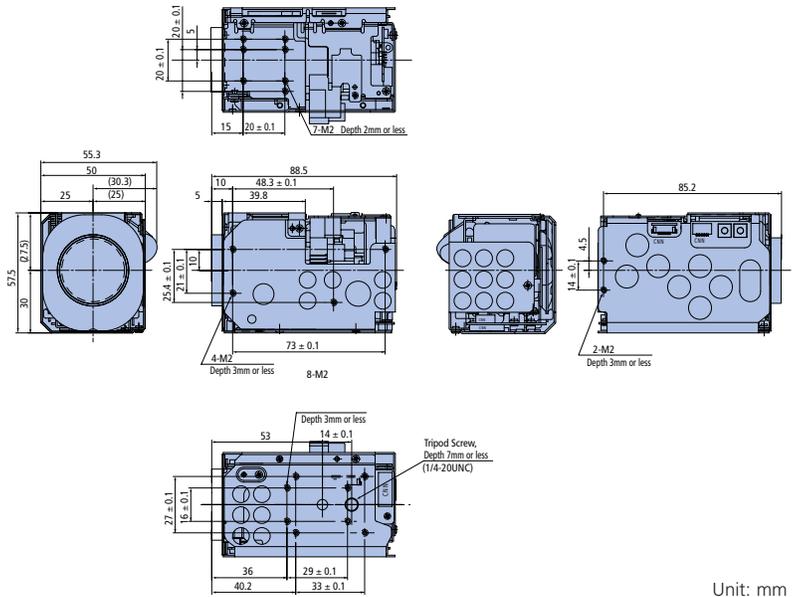


Unit: mm



FCB-EX480C/EX480CP

- 1/4-type EXview HAD CCD
- Minimum illumination of 0.7 lx (typical)
- 216x Zoom Ratio (18x optical, 12x digital)
- Enhanced Spherical Privacy Zone Masking Function
- E-Flip Function
- Alarm Function
- Spot AE
- Auto ICR (IR Cut-Filter Removal) Mode
- Picture Freeze Function
- Key Switch Connector (CN601) for Camera Control with External Equipment
- Electronic Shutter/Slow Shutter
- High-Speed Serial Interface (maximum 38.4 Kb/s) with TTL Signal-Level Control (VISCA protocol)
- Internal/External Sync

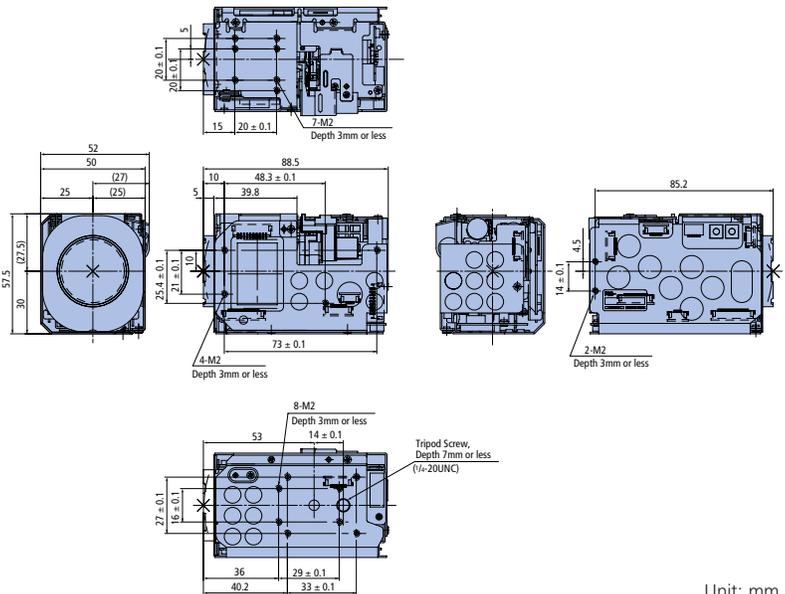


Unit: mm



FCB-EX48C/EX48CP

- 1/4-type EXview HAD CCD
- Minimum illumination of 0.7 lx (typical)
- 216x Zoom Ratio (18x optical, 12x digital)
- Enhanced Privacy Zone Masking Function
- E-Flip Function
- Alarm Function
- Spot AE
- Picture Freeze Function
- Key Switch Connector (CN601) for Camera Control with External Equipment
- Electronic Shutter/Slow Shutter
- High-Speed Serial Interface (maximum 38.4 Kb/s) with TTL Signal-Level Control (VISCA protocol)
- Internal/External Sync

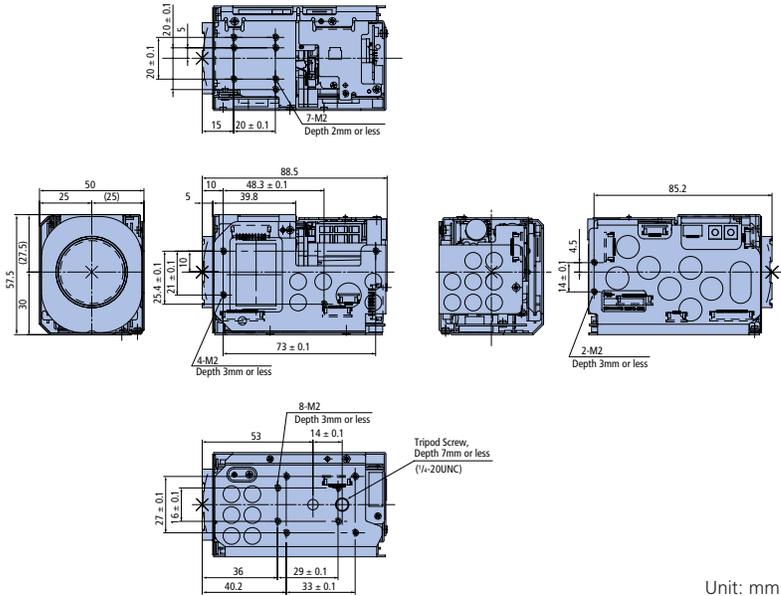

Unit: mm

PIN ASSIGNMENT

FCB-EX980S/EX980SP/EX980/EX980P

CN902 4-pin for Y/C Video Out

Pin No.	Name	Level
1	Y_OUT	1.0 Vp-p (75Ω terminate) Luminance signal
2	GND (for Y signal)	–
3	C_OUT	Chrominance signal
4	GND (for C signal)	–

Connector: JST S4B-ZR-SM3A-TF

CN901 9-pin for DC/Video Out

Pin No.	Name	Level
1	RxD	TTL/CMOS Level Read Data
2	TxD	TTL/CMOS Level Send Data
3	GND (for RxD & TxD)	–
4	DC IN	9.0 V ±3.0 V
5	GND (for DC IN)	–
6	VBS OUT	1.0 Vp-p (75 Ω terminate)
7	GND (for VBS OUT)	–
8	V LOCK PULSE	External VD-Lock Pulse (EX.FV: Negative, 3.0 Vp-p 50% duty)
9	GND (VL PULSE)	–

Connector: ELCO PG-FPC9SM-T

CN601 12-pin for Key Switch Control

Pin No.	Name	Level
1	GND	–
2	GND	–
3	KEY_AD0	Pull up to 3.0 V by 100 kΩ
4	KEY_AD1	Pull up to 3.0 V by 100 kΩ
5	KEY_AD2	Pull up to 3.0 V by 100 kΩ
6	KEY_AD3	Pull up to 3.0 V by 100 kΩ
7	KEY_AD4	Pull up to 3.0 V by 100 kΩ
8	KEY_AD5	Pull up to 3.0 V by 100 kΩ
9	KEY_AD6	Pull up to 3.0 V by 100 kΩ
10	KEY_AD7	Pull up to 3.0 V by 100 kΩ
11	NC	–
12	Strobe	Strobe timing pulse (0 to 3.0 V)

FCB-EX480C/EX480CP/EX48C/EX48CP

CN991 4-pin for Y/C Video Out

Pin No.	Name	Level
1	Y_OUT	1.0 Vp-p (75Ω terminate) Luminance signal
2	GND (for Y signal)	–
3	C_OUT	Chrominance signal
4	GND (for C signal)	–

Connector: JST S4B-ZR-SM3A-TF

CN903 9-pin for DC/Video Out

Pin No.	Name	Level
1	DC IN	6.0 V to 12.0 V
2	GND (for DC IN)	–
3	NC	–
4	VBS OUT	Composite video signal
5	GND (for VBS OUT)	–
6	Y_OUT	1.0 ±0.2 V
7	GND (for Y signal)	–
8	C_OUT	–
9	GND (for C signal)	–

Connector: JST S9B-ZR-SM3A-TF

CN992 9-pin for DC/Video Out/VD-Lock Pulse/VISCA

Pin No.	Name	Level
1	RxD	CMOS 5.0 V (low: max. 0.8 V, high: min. 2.0 V) Read Data
2	TxD	CMOS 5.0 V (low: max. 0.1 V, high: min. 4.4 V) Send Data
3	GND (for RxD & TxD)	–
4	DC IN	9.0 ±3.0 V
5	GND (for DC IN)	–
6	VBS OUT	1.0 ±0.2 V
7	GND (for VBS OUT)	–
8	V LOCK PULSE	External VD-Lock Pulse (EX.FV: Negative, 3.0 Vp-p 50% duty)
9	GND (VL PULSE)	–

CN601 12-pin for Key Switch Control

Pin No.	Name	Level
1	GND	–
2	GND	–
3	KEY_AD0	Pull up to 3.0 V by 100 kΩ
4	KEY_AD1	Pull up to 3.0 V by 100 kΩ
5	KEY_AD2	Pull up to 3.0 V by 100 kΩ
6	KEY_AD3	Pull up to 3.0 V by 100 kΩ
7	KEY_AD4	Pull up to 3.0 V by 100 kΩ
8	KEY_AD5	Pull up to 3.0 V by 100 kΩ
9	KEY_AD6	Pull up to 3.0 V by 100 kΩ
10	KEY_AD7	Pull up to 3.0 V by 100 kΩ
11	NC	–
12	Strobe	Strobe timing pulse (0 to 3.0 V)

SPECIFICATIONS

	FCB-EX980S	FCB-EX980SP	FCB-EX980	FCB-EX980P
Image device	1/4-type Super HAD		1/4-type EXview HAD CCD	
Signal System	NTSC	PAL	NTSC	PAL
Effective picture elements	Approx. 680,000 pixels	Approx. 800,000 pixels	Approx. 380,000 pixels	Approx. 440,000 pixels
Lens	26x optical zoom, f=3.5 mm (wide) to 91.0 mm (tele), F1.6 to F3.8			
Digital zoom	12x (312x with optical zoom)			
Viewing angle (H)	42.2° (wide end) to 1.6° (tele end)		55° (wide end) to 2.3° (tele end)	
Minimum working distance	320 mm (wide end) to 1500 mm (tele end)			
Sync system	Internal/External (V-Lock)			
Minimum illumination	2.0 lx (typical) (F1.6, 50 IRE)		1.0 lx (typical) (F1.6, 50 IRE)	
S/N ratio	More than 50 dB			
Electronic shutter	1/1 to 1/10,000 s, 22 steps			
White balance	Auto, ATW, Indoor, Outdoor, One-push, Manual			
Gain	Auto/Manual (-3 to 28 dB, 2 dB steps)			
AE control	Auto, Manual, Priority mode, Bright, EV compensation, Back-light compensation			
EV compensation	-10.5 to +10.5 dB (1.5 dB steps)			
Back-light compensation	On/Off			
Privacy zone masking	On/Off (24 positions)			
Flicker cancel	Auto	-	Auto	-
Focusing system	Auto (Sensitivity: normal, low), One-push AF, Manual, Infinity, Interval AF, Zoom Trigger AF			
Picture effects	E-Flip, Nega Art, Black&White, Mirror Image			
Camera operation switch	Zoom tele, Zoom wide			
Video output	VBS: 1.0 Vp-p (sync negative), Y/C Output			
Camera control interface	VISCA (TTL signal level), baud rate: 9.6 Kb/s, 19.2 Kb/s, 38.4 Kb/s, 1 or 2 Stop bit selectable			
Storage temperature	-4 to 140°F (-20 to 60°C)			
Operating temperature	32 to 122°F (0 to +50°C)			
Power consumption	6 to 12 V DC/1.6 W (motors inactive), 3.3 W (motors active)			
Weight	8.1 oz (230 g)			
Dimensions (WxHxD)	2 1/4 x 2 3/8 x 3 1/2 inches (55.3 x 57.5 x 88.5 mm)			

	FCB-EX480C	FCB-EX480CP	FCB-EX48C	FCB-EX48CP
Image device	1/4-type EXview HAD CCD			
Signal System	NTSC	PAL	NTSC	PAL
Effective picture elements	Approx. 380,000 pixels	Approx. 440,000 pixels	Approx. 380,000 pixels	Approx. 440,000 pixels
Lens	18x optical zoom, f=4.1 mm (wide) to 73.8 mm (tele), F1.4 to F3.0			
Digital zoom	12x (216x with optical zoom)			
Viewing angle (H)	48.0° (wide end) to 2.8° (tele end)			
Minimum working distance	35 mm (wide end) to 800 mm (tele end)			
Sync system	Internal/External (V-Lock)			
Minimum illumination	0.7 lx (typical) (F1.4, 50 IRE)			
S/N ratio	More than 50 dB			
Electronic shutter	1/1 to 1/10,000 s, 22 steps			
White balance	Auto, ATW, Indoor, Outdoor, One-push, Manual			
Gain	Auto/Manual (-3 to 28 dB, 2 dB steps)			
AE control	Auto, Manual, Priority mode, Bright, EV compensation, Back-light compensation			
EV compensation	-10.5 to +10.5 dB (1.5 dB steps)			
Back-light compensation	On/Off			
Privacy zone masking	On/Off (24 positions)			
Flicker cancel	Auto	-	-	-
Focusing system	Auto (Sensitivity: normal, low), One-push AF, Manual, Infinity, Interval AF, Zoom Trigger AF			
Picture effects	E-Flip, Nega Art, Black&White, Mirror Image			
Camera operation switch	Zoom tele, Zoom wide			
Video output	VBS: 1.0 Vp-p (sync negative), Y/C Output			
Camera control interface	VISCA (TTL signal level), baud rate: 9.6 Kb/s, 19.2 Kb/s, 38.4 Kb/s, 1 or 2 Stop bit selectable			
Storage temperature	-4 to 140°F (-20 to 60°C)			
Operating temperature	32 to 122°F (0 to +50°C)			
Power consumption	6 to 12 V DC/1.6 W (motors inactive), 2.5 W (motors active)			
Weight	8.1 oz (230 g)			
Dimensions (WxHxD)	2 1/8 x 2 3/8 x 3 1/2 inches (52.0 x 57.5 x 88.5 mm)		2 x 2 3/8 x 3 1/2 inches (50.0 x 57.5 x 88.5 mm)	

SONY®

Sony Electronics Inc.
1 Sony Drive
Park Ridge, NJ 07656
201-930-7000
www.sony.com/videocameras

IS-1191
MK10195V1

©2005 Sony Corporation. All rights reserved.
Reproduction in whole or in part without written permission is prohibited.
Design, features and specifications are subject to change without notice.
All non-metric weights and measures are approximate.
Sony, EXview HAD, Super HAD and VISCA are trademarks of Sony.

image is
everything™

Printed in USA (2/05)